



H CLASS MILL CHAINS / H CLASS TRANSFER CHAINS

CONVEYOR CHAIN SERIES



COTTERED

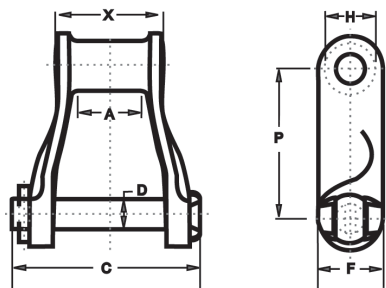

RIVETED

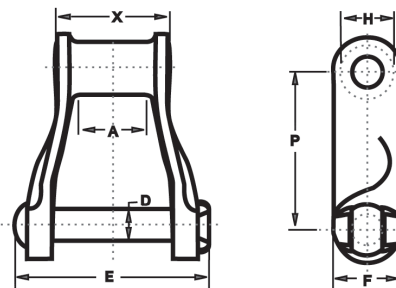

Chain No.	Pitch	Sprocket face	Cott. Pin Length	Pin Diameter	Riv. Pin Length	Plate depth	Barrel Diameter	Bearing length	Average Ultimate Strength	Weight approx.
	P	A	C	D	E	F	H	X	Q	q
	mm	mm	mm	mm	mm	mm	mm	mm	KN	kg/m
H60	58.62	19.05	66.55	7.92	66.55	19.05	19.05	38.10	42.0	3.13
H74	66.27	25.40	79.24	9.53	73.15	25.40	22.35	42.16	60.1	5.21
H78	66.27	28.45	84.07	12.70	81.03	28.45	22.35	47.75	98.8	6.25
H79	66.27	28.45	84.07	12.70	81.03	28.45	22.35	47.75	108.1	7.14
H82	78.11	31.75	98.55	14.27	98.55	31.75	30.98	53.84	120.1	8.93
H87	101.60	38.10	111.25	15.88	106.43	35.05	35.05	60.45	150.1	9.67
H124	101.60	41.15	123.95	19.05	120.65	39.62	36.58	69.85	180.2	13.10

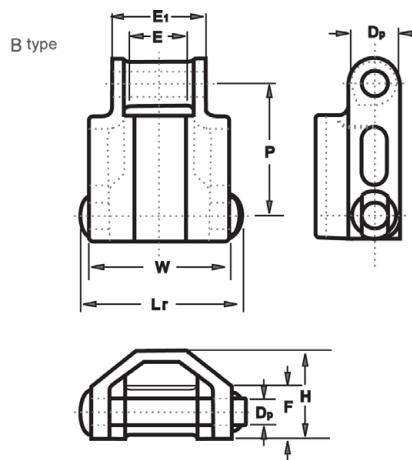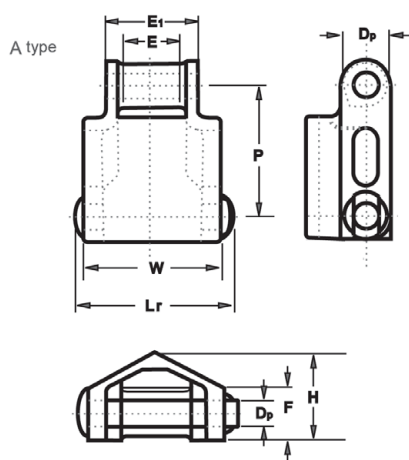

Chain No.	Type	Pitch	Sprocket face	Barrel length	Barrel diameter	Pin diameter	Plate depth	Height	Width	Riv. Pin length	Ultimate tensile strength	Weight approx.
		P	E	E1	Db	Dp	F	H	W	Lr	Q	q
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN
H78A	A	66.27	28.45	47.75	22.35	12.70	25.40	42.93	71.37	82.55	92.5	8.4
H78B	B	66.27	28.45	47.75	22.35	12.70	25.40	42.93	71.37	82.55	92.5	9.1
H130	A	101.6	25.40	41.15	25.40	12.70	26.92	42.93	71.37	82.55	81.0	7.8
H131	A	101.6	41.15	63.50	31.75	15.88	39.62	57.15	87.38	101.60	133.0	12.5
H138	B	101.6	25.40	41.15	25.40	12.70	26.92	42.93	71.37	82.55	86.7	8.6