


MOTORCYCLE ROLLER CHAINS

TRANSMISSION CHAIN SERIES

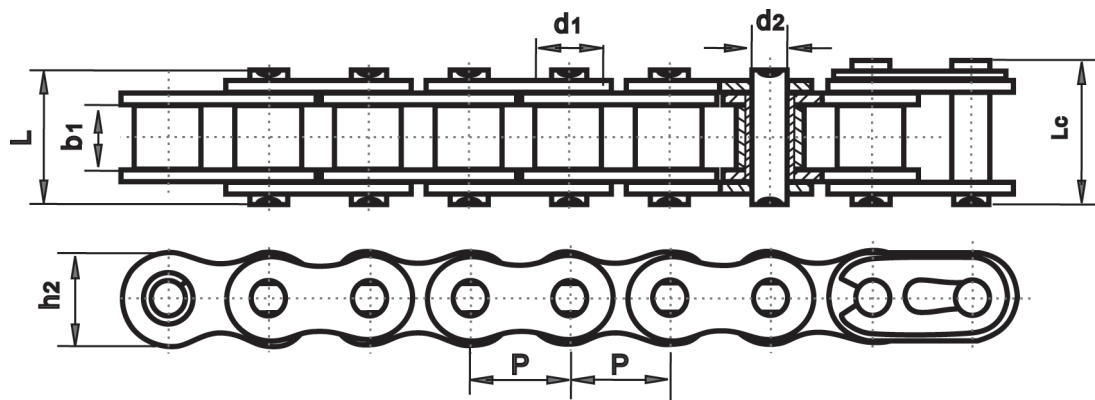

| Chain No. | Pitch | Roller diameter | Pin diameter | Width between inner plates | Pin Length | | plate depth | Ultimate tensile strength | Weight approx |
|-----------|--------|-----------------|--------------|----------------------------|------------|---------|-------------|---------------------------|---------------|
| | P | d1(max) | d2(max) | b1(min) | L(max) | Lc(max) | h2(max) | Q | q |
| | mm | mm | mm | mm | mm | mm | mm | KN | kg/m |
| 06B* | 9.525 | 6.35 | 3.28 | 5.72 | 13.20 | 14.10 | 8.20 | 9.00 | 0.41 |
| 415 | 12.70 | 7.75 | 3.96 | 5.10 | 12.50 | 13.80 | 10.40 | 11.60 | 0.46 |
| 415H | 12.70 | 7.75 | 3.96 | 4.76 | 13.10 | 14.50 | 12.00 | 14.40 | 0.50 |
| 420 | 12.70 | 7.77 | 3.96 | 6.35 | 14.75 | 16.10 | 12.00 | 16.00 | 0.55 |
| 420H | 12.70 | 7.77 | 3.96 | 6.35 | 16.00 | 17.40 | 12.00 | 17.00 | 0.69 |
| 428 | 12.70 | 8.51 | 4.45 | 7.75 | 16.70 | 18.05 | 12.30 | 17.80 | 0.71 |
| 428HG | 12.70 | 8.51 | 4.51 | 7.94 | 18.90 | 19.00 | 12.30 | 20.60 | 0.79 |
| 520 | 15.875 | 10.16 | 5.08 | 6.35 | 17.70 | 20.50 | 15.00 | 26.50 | 0.89 |
| 520H | 15.875 | 10.16 | 5.24 | 6.35 | 19.15 | 20.90 | 15.00 | 30.00 | 0.96 |
| 525 | 15.875 | 10.16 | 5.08 | 7.94 | 19.40 | 22.20 | 15.00 | 26.50 | 0.93 |
| 525H | 15.875 | 10.16 | 5.24 | 7.94 | 20.90 | 22.20 | 15.00 | 30.00 | 1.00 |
| 530 | 15.875 | 10.16 | 5.08 | 9.40 | 20.90 | 24.20 | 15.00 | 26.50 | 1.06 |
| 530H | 15.875 | 10.16 | 5.24 | 9.50 | 22.50 | 24.20 | 15.00 | 30.00 | 1.15 |
| 630 | 19.05 | 11.91 | 5.94 | 12.63 | 25.90 | 27.70 | 18.00 | 35.00 | 1.50 |

* Straight side plates