


OFFSET SIDEBAR CHAINS

TRANSMISSION CHAIN SERIES

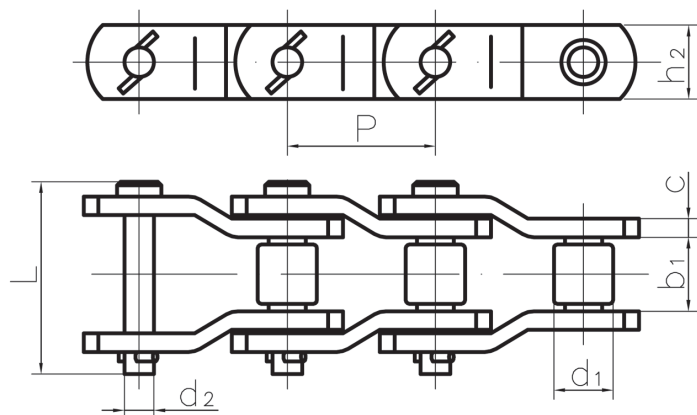

Chain No. ISO GB	Pitch P	Inside Width b1(min)	Roller dia. d1(max)	Plate		Pin		Ultimate tensile strength Q KN	Weight approx. q kg/m
				Depth h2(max)	Thickness C(max)	Length L(max)	dia. d2(max)		
				mm	mm	mm	mm		
2010	63.50	38.10	31.75	47.8	7.9	90.7	15.9	250	15
2512	77.90	39.60	41.28	60.5	9.7	103.4	19.08	340	18
2814	88.90	38.10	44.45	60.5	12.7	117.6	22.25	470	25
3315	103.45	49.30	45.24	63.5	14.2	134.9	23.85	550	27
3618	114.30	52.30	57.15	79.2	14.2	141.2	27.97	760	38
4020	127.00	69.90	63.50	91.9	15.7	168.1	31.78	990	52
4824	152.4	76.20	76.20	104.6	19.0	187.5	38.13	1400	73
5628	177.8	82.60	88.90	133.4	22.4	215.9	44.48	1890	108
WG781	78.18	38.1	33	45	10	97	17	313.6	16
WG103	103.20	49.2	46	60	13	125.5	23	539.0	26
WG103H	103.20	49.2	46	60	16	135	23	539.0	31
WG140	140.00	80.0	65	90	20	187	35	1176.0	59.2
WG10389	103.89	49.2	46	70	16	142	26.7	1029.0	32
WG9525	95.25	39.0	45	65	16	124	23.0	635.0	22.25
WG7900	79.00	39.0	31.5	54	9.5	93.5	18.5	380.9	12.28
WG7938	79.38	41.2	40	57.2	9.5	100	19.5	509.0	18.7
W 3H	78.11	38.1	31.75	41.5	9.5	92.5	15.88	389.2	12.4
W 4	103.20	49.1	44.45	54.0	12.7	122.2	22.23	622.5	21.0
W 1602AA	127.00	70.0	63.50	90.0	16.0	161.2	31.75	1529.4	52.3
W 3	78.11	38.1	31.75	38.0	8.0	86.5	15.88	271.5	10.5
W 5	103.20	38.6	44.45	54.0	12.7	111.7	22.23	622.5	19.9