


SIDE BOW CHAINS

TRANSMISSION CHAIN SERIES

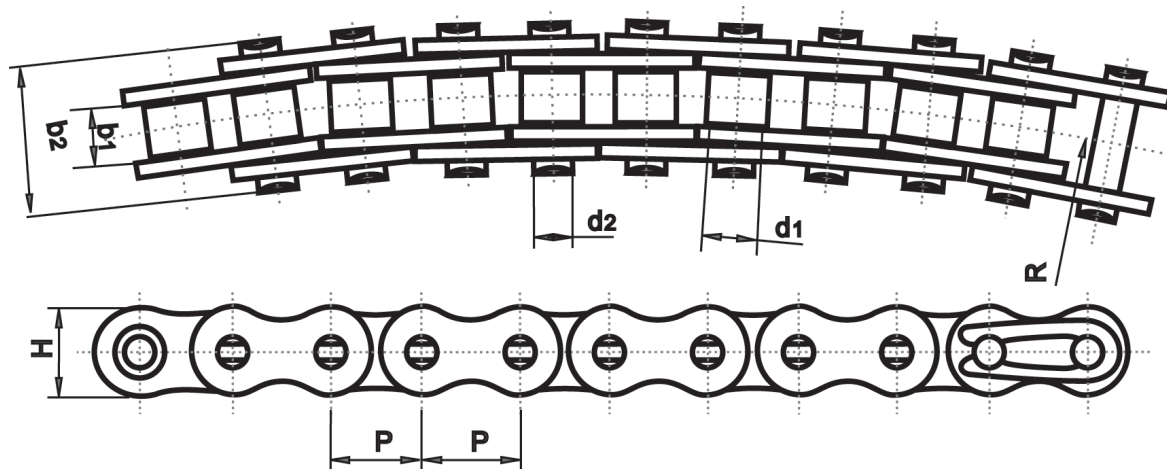

Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length	Radius of sidebow	plate depth	Plate thickness	Ultimate tensile strength
	P	d1(max)	b1(min)	d2(max)	b2(max)	R(min)	H(max)	T(max)	Q
	mm	mm	mm	mm	mm	mm	mm	mm	KN
35SB	9.525	5.08	4.78	3.28	12.2	250	8.9	1.30	7.60
40SB	12.70	7.92	7.85	3.45	16.7	315	12.0	1.50	13.80
50SB	15.875	10.16	9.40	4.37	21.0	400	15.0	2.03	21.80
60SB	19.05	11.91	12.57	5.08	26.0	500	18.0	2.42	31.10
80SB	25.40	15.88	15.75	7.19	33.5	650	24.1	3.25	40.10
C2040SB	25.40	7.92	7.85	3.45	16.7	600	12.0	1.50	13.80
C2050SB	31.75	10.16	9.40	4.37	21.0	750	15.0	2.03	21.80
C2060SB	38.10	11.91	12.57	5.08	26.0	800	18.0	2.42	31.30