


DOUBLE PLUS CONVEYOR CHAINS

CONVEYOR CHAIN SERIES

CONVEYOR CHAIN

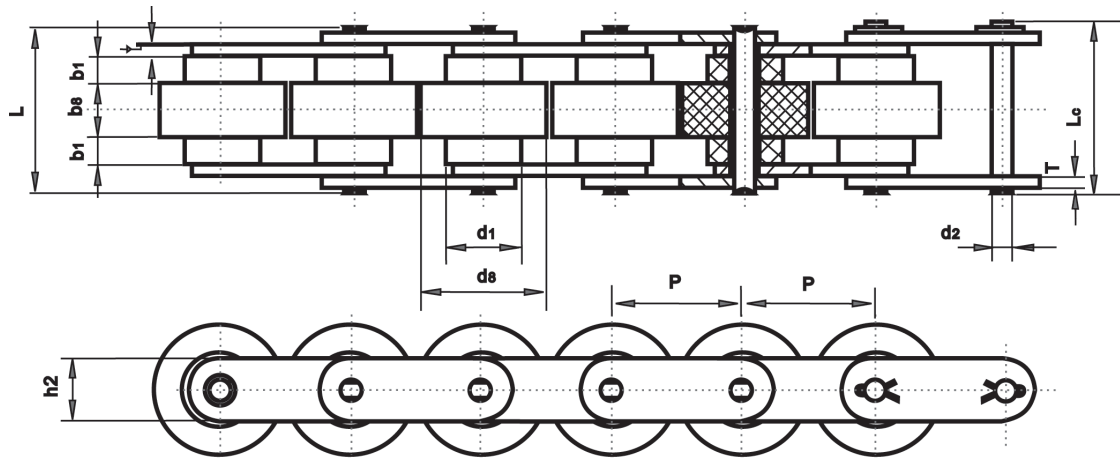

Chain No.	Pitch	Roller dimensions				Pin dimensions			Plate dimensions			Weight approx
	P	d1(max)	d8(max)	b1(min)	b8(max)	d2(max)	L(max)	Lc(max)	h2(max)	T(max)	t(max)	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/m
BS25-C206B	19.05	11.91	18.30	4.00	8.00	3.28	24.0	25.60	8.20	1.30	1.50	0.52
BS25-C208A	25.40	15.88	24.60	5.70	10.30	3.96	31.0	32.80	11.70	1.50	1.50	0.79
BS25-C210A	31.75	19.05	30.60	7.10	13.00	5.08	39.5	41.20	15.00	2.03	2.03	1.36
BS25-C212A	38.10	22.23	36.60	8.50	15.50	5.94	48.8	50.50	18.00	3.25	3.25	2.19
BS25-C216A	50.80	28.58	49.00	11.00	21.50	7.92	66.2	70.00	24.00	4.00	5.00	4.06
BS30-C206B	19.05	9.00	18.30	4.50	9.10	3.28	26.3	29.60	7.28	1.30	1.50	0.50
BS30-C208A	25.40	11.91	24.60	6.10	12.50	3.96	35.6	39.50	9.60	1.50	2.00	0.83
BS30-C210A	31.75	14.80	30.60	7.50	15.00	5.08	43.0	47.10	12.20	2.00	2.40	1.27
BS30-C212A	38.10	18.00	37.00	9.75	20.00	5.94	58.1	62.70	15.00	3.00	4.00	2.14
BS30-C216A	50.80	22.23	49.00	12.00	25.20	7.92	71.9	77.30	18.60	4.00	5.00	3.55