



MOTORCYCLE SILENT CHAINS

TRANSMISSION CHAIN SERIES

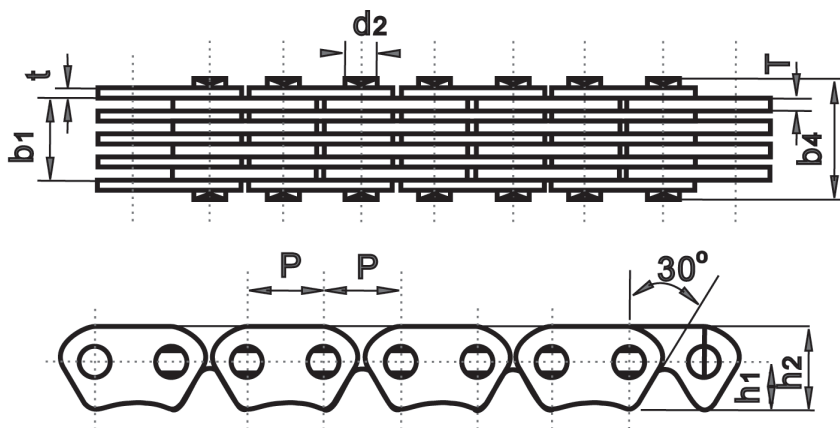

Chain No.	Pitch	Lacing	Chain width	Pin diameter	Pin length	Plate thickness	Distance from hole centre to tooth	Inner plate depth	Guide	Number of plates	Ultimate tensile strength	Weight approx.
	P mm										b1(max) mm	d2(max) mm
CL04A	6.35	2x3	3.10	(2.7)2.52	6.2	1.03/0.75	3.92	6.72	Outside	5	5.0	0.173
CL04A		3x4	5.18	(2.7)2.52	8.4	1.03/0.75	3.92	6.72	Outside	7	7.6	0.248
CL04A		4x5	7.25	(2.7)2.52	11.0	1.03/1.03	3.92	6.72	Outside	9	9.5	0.340
CL04AH		4x4	7.35	(2.7)2.52	11.2	1.2/1.2	3.92	6.72	Outside	8	11.5	0.380
CL04AH		5x6	11.05	(2.7)2.52	15.3	1.2/1.2	3.92	6.72	Outside	11	14.5	0.490

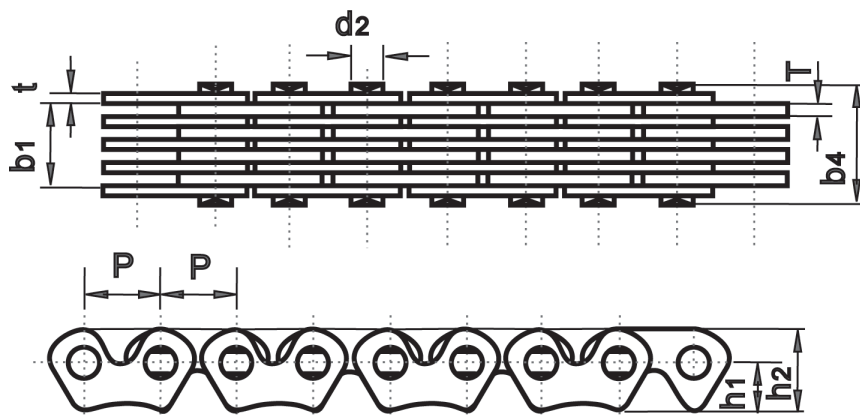

Chain No.	Pitch	Lacing	Chain width	Pin diameter	Pin length	Plate thickness	Distance from hole centre to tooth	Inner plate depth	Guide	Number of plates	Ultimate tensile strength	Weight approx.
	P mm										b1(max) mm	d2(max) mm
CL04R	6.35	2x3	3.10	2.5	6.2	1.03/0.75	3.90	6.72	Inside	5	5.2	0.169
CL04R		3x4	5.18	2.5	8.4	1.03/0.75	3.90	6.72	Inside	7	7.8	0.242
CL04R		4x5	7.25	2.5	10.6	1.03/1.03	3.90	6.72	Inside	9	10.4	0.315