


COUPLING CHAINS

TRANSMISSION CHAIN SERIES

TRANSMISSION CHAIN

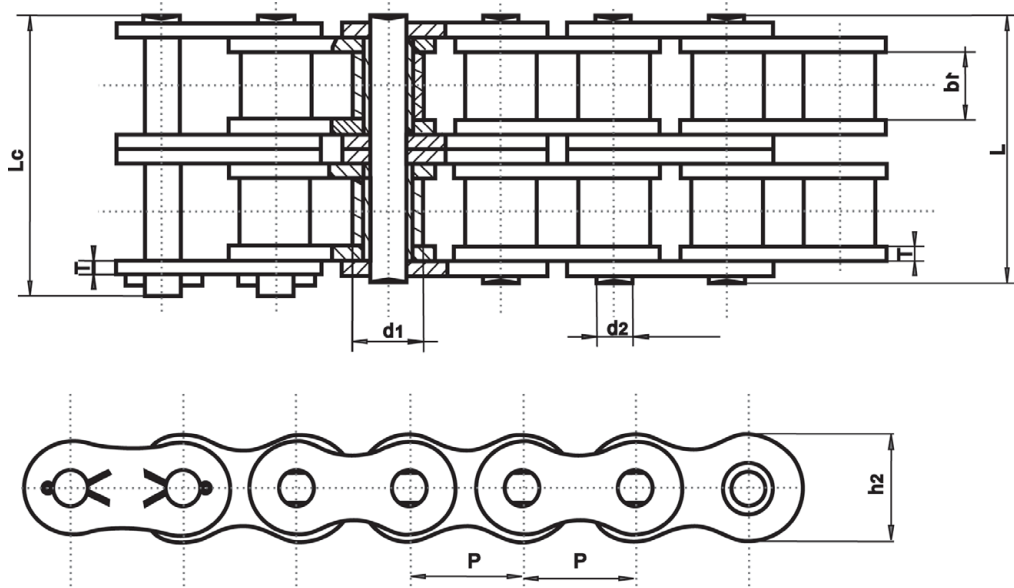

Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Plate thickness	Inner plate depth	Transverse pitch	Pin length		Ultimate tensile strength	Weight approx
	P	d1(max)	b1(min)	d2(max)	T(max)	h2(max)	P t	L(max)	Lc(max)	Q	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	kg/m
4012	12.70	7.95	7.85	3.96	1.50	12.00	14.38	31.00	32.20	28.20	0.16
4014											0.19
4016											0.21
5014	15.875	10.16	9.40	5.08	2.03	15.09	18.11	38.90	40.40	44.40	0.49
5016											0.56
5018											0.63
6018	19.05	11.91	12.57	5.94	2.42	18.00	22.78	48.80	50.50	63.60	1.00
6020											1.11
6022											1.22
8018	25.40	15.88	15.75	7.92	3.25	24.00	29.29	62.70	64.30	113.40	2.35
8020											2.62
8022											2.86
10022	31.75	19.05	18.90	9.53	4.00	30.00	35.76	76.40	80.50	177.00	4.95
12018	38.10	22.23	25.22	11.10	4.80	35.70	45.44	95.80	99.70	254.00	8.14